Foresee the Future

Outdoor TB series LED Display

P3.9 / P4.8 500*500 500*750 500*1000

NOVA MEDIA 官網

Blend with nature

Point spacing：	3.9mm、4.8mm
Module size：	500mm*250mm (WxH)
Cabinet size：	500mm*500mm*82mm
(W*H*D)	500mm*750mm*82mm
	500mm*1000mm*82mm
Weight：	9.6Kg、12.5Kg、16.6Kg

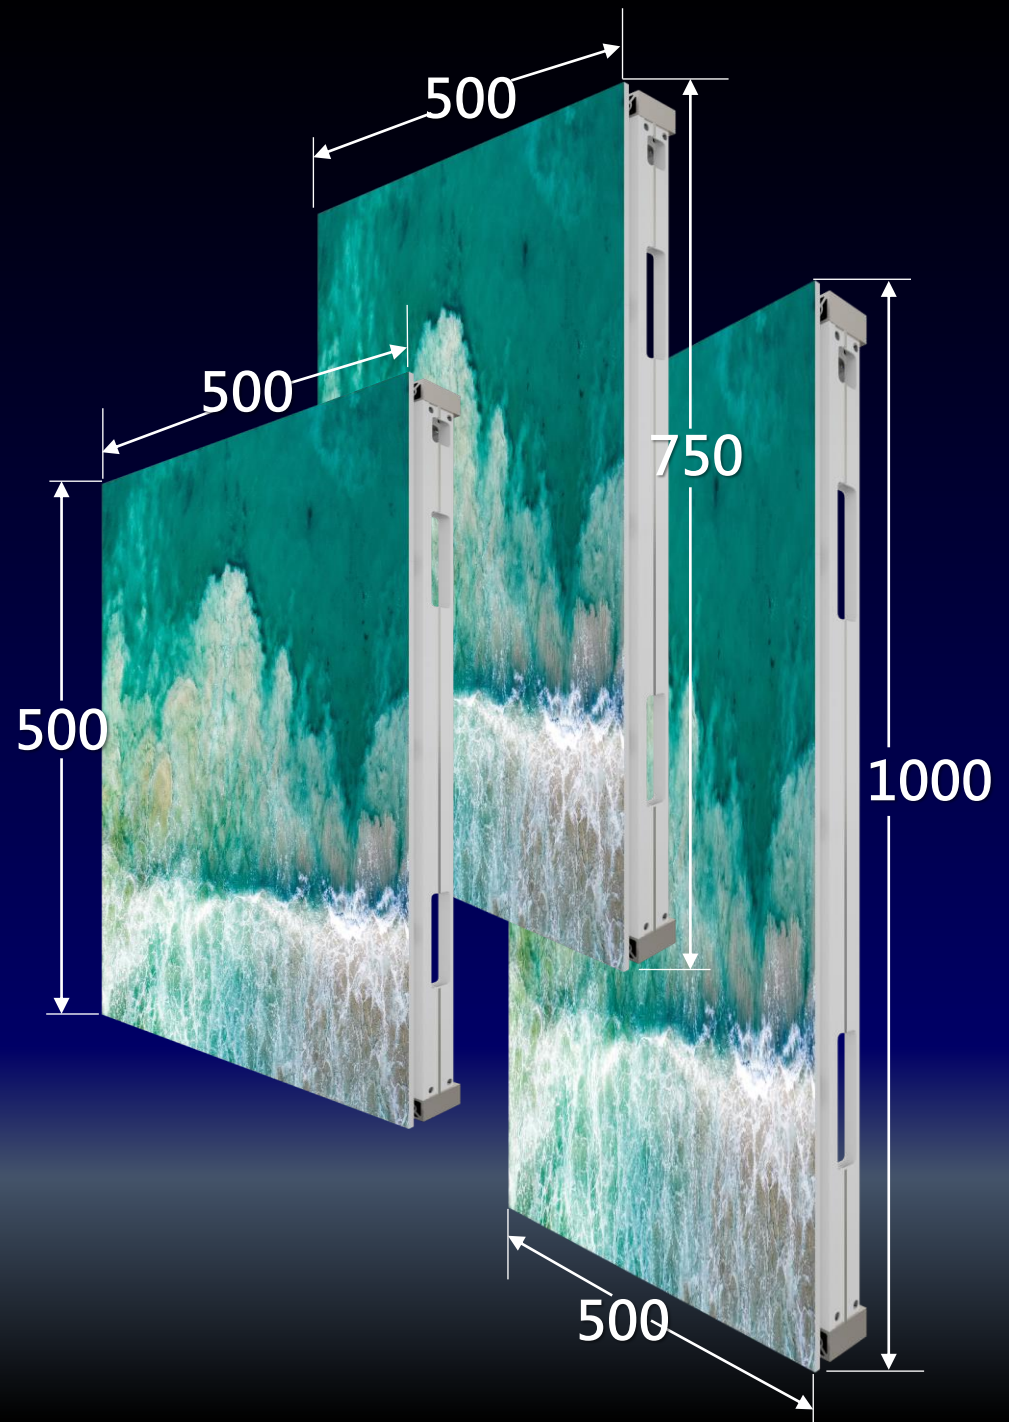

SMD chip technology

44"depth color screen

Highest resolution

128*256 dpi

Refresh rate

3,840 Hz

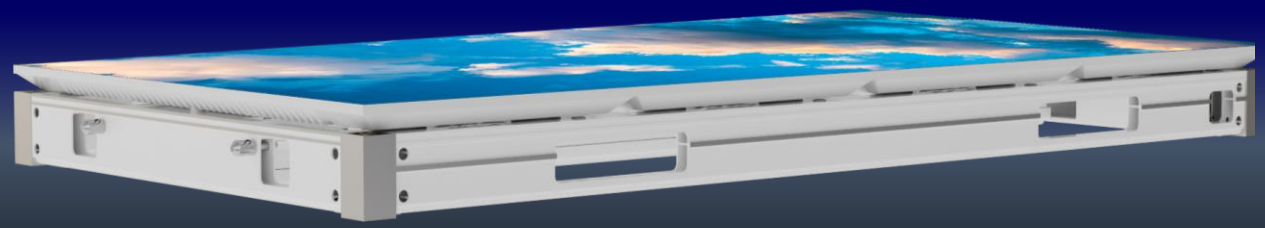

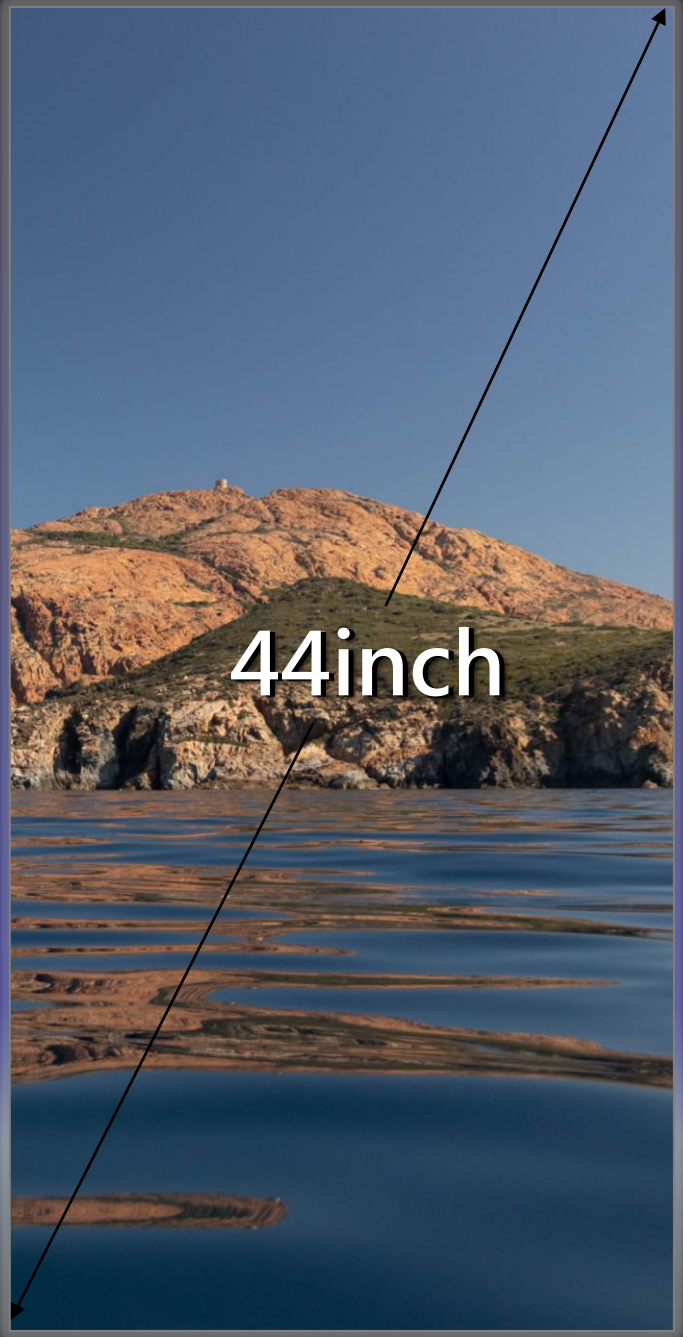

Grayscale

14bit

NTSC gamut

110%

contrast

6000 : 1

Brightness

5000nit

Maximum power consumption

560W/㎡

Energy conservation

Reduce operating costs

High-tech

SMD laser patch

Quality materials

Quality selection of lamp beads

Product protection

Dark dust mask

High configuration

Brand high brush IC

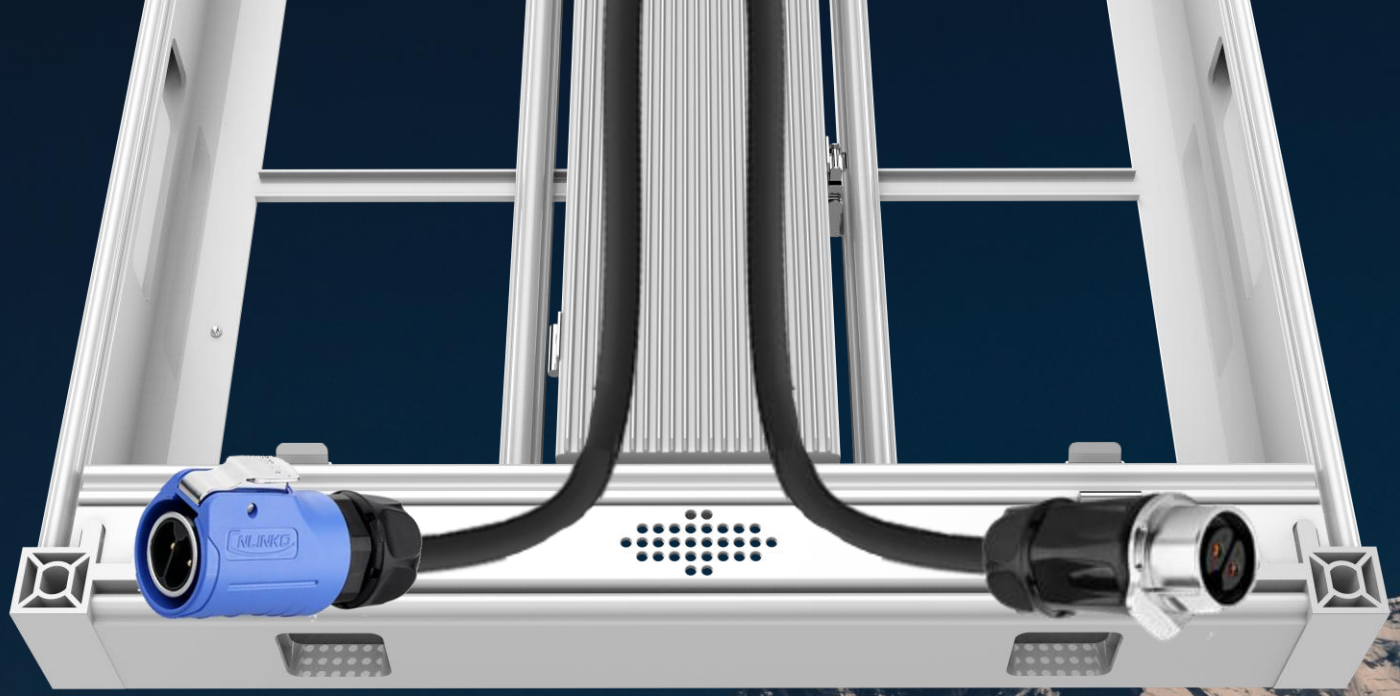

Efficient installation with built-in cable

The power signal adopts the aviation butt head with its own wire design to improve the efficiency of product installation

Improved heat dissipation efficiency :

210% ⬆

Cabinet material :

High thermal conductivity aluminum profiles

Lightweight design :

9.6Kg/12.5Kg/16.6Kg

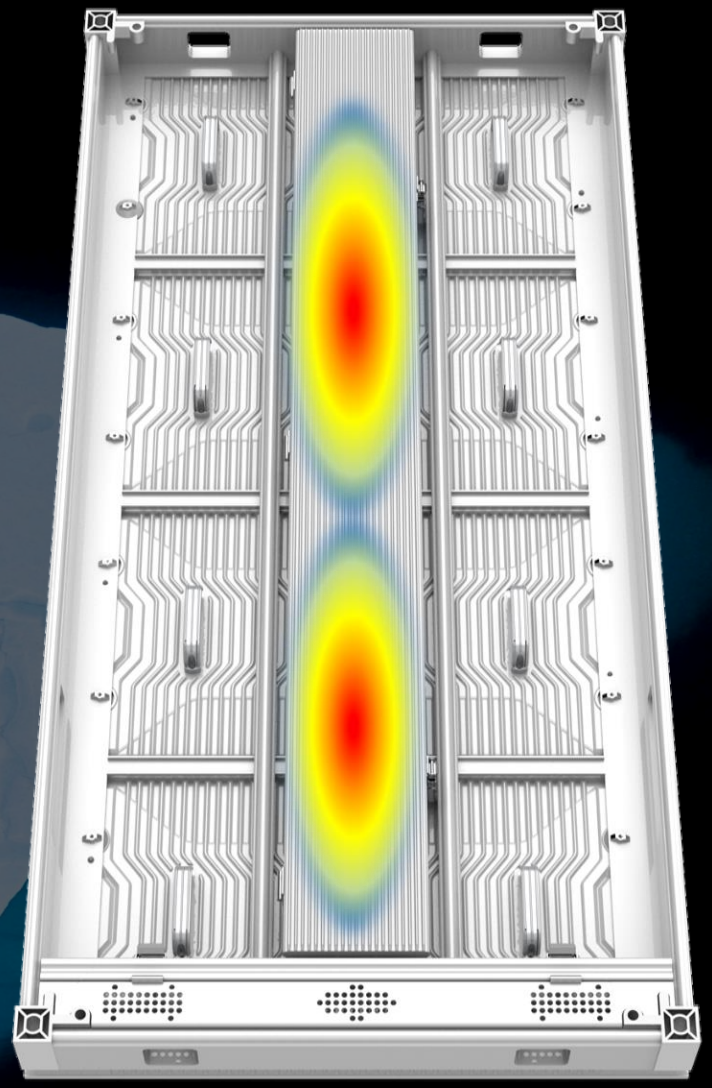

Die-casting aluminum products generally have a conductivity of about 80-90W/M.K
The thermal conductivity of aluminum profile products is about 180-190W/M.K

Beauty is creeping in

The whole box has no sound components, and the single box runs up to 5 dB

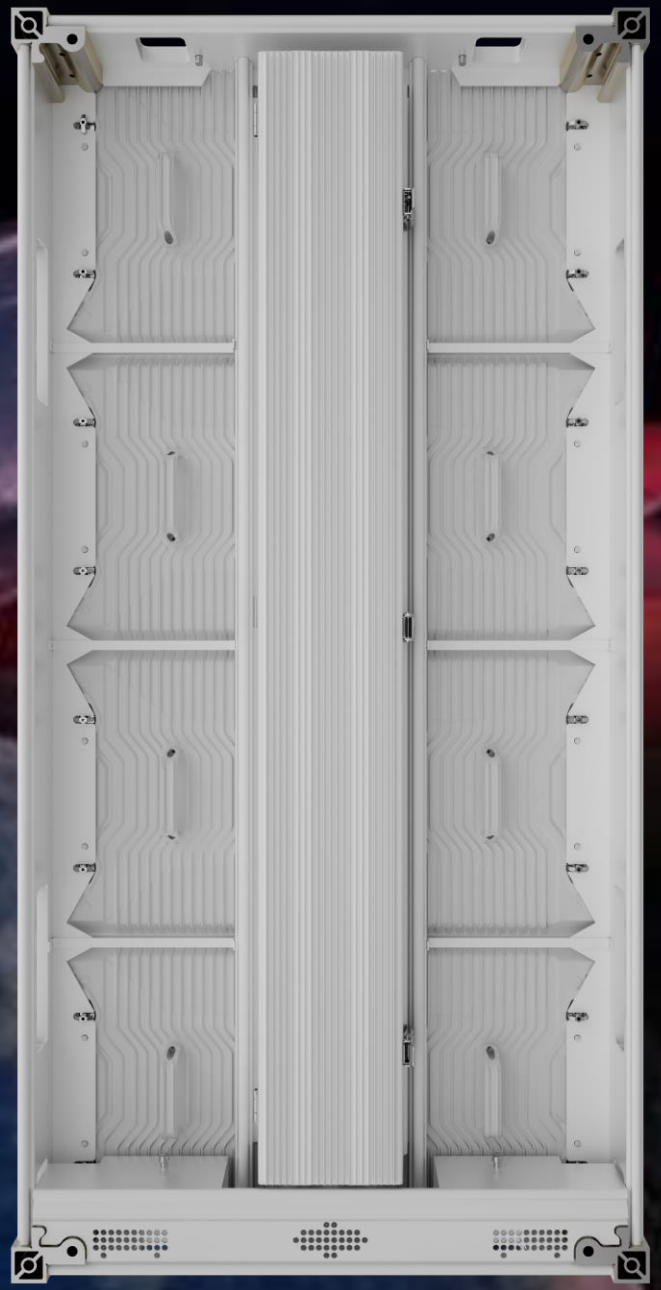

Bare-chested waterproof performance

THE FULL RANGE OF TB HAS IP65 PROTECTION RATING,
Full protection for waterproof and dustproof functions

Choice comes from ownership

Choose from a variety of colors to create different eye-catching scenes

Mint green

sky blue

Ivory white

Chinese Red

Graphite ash

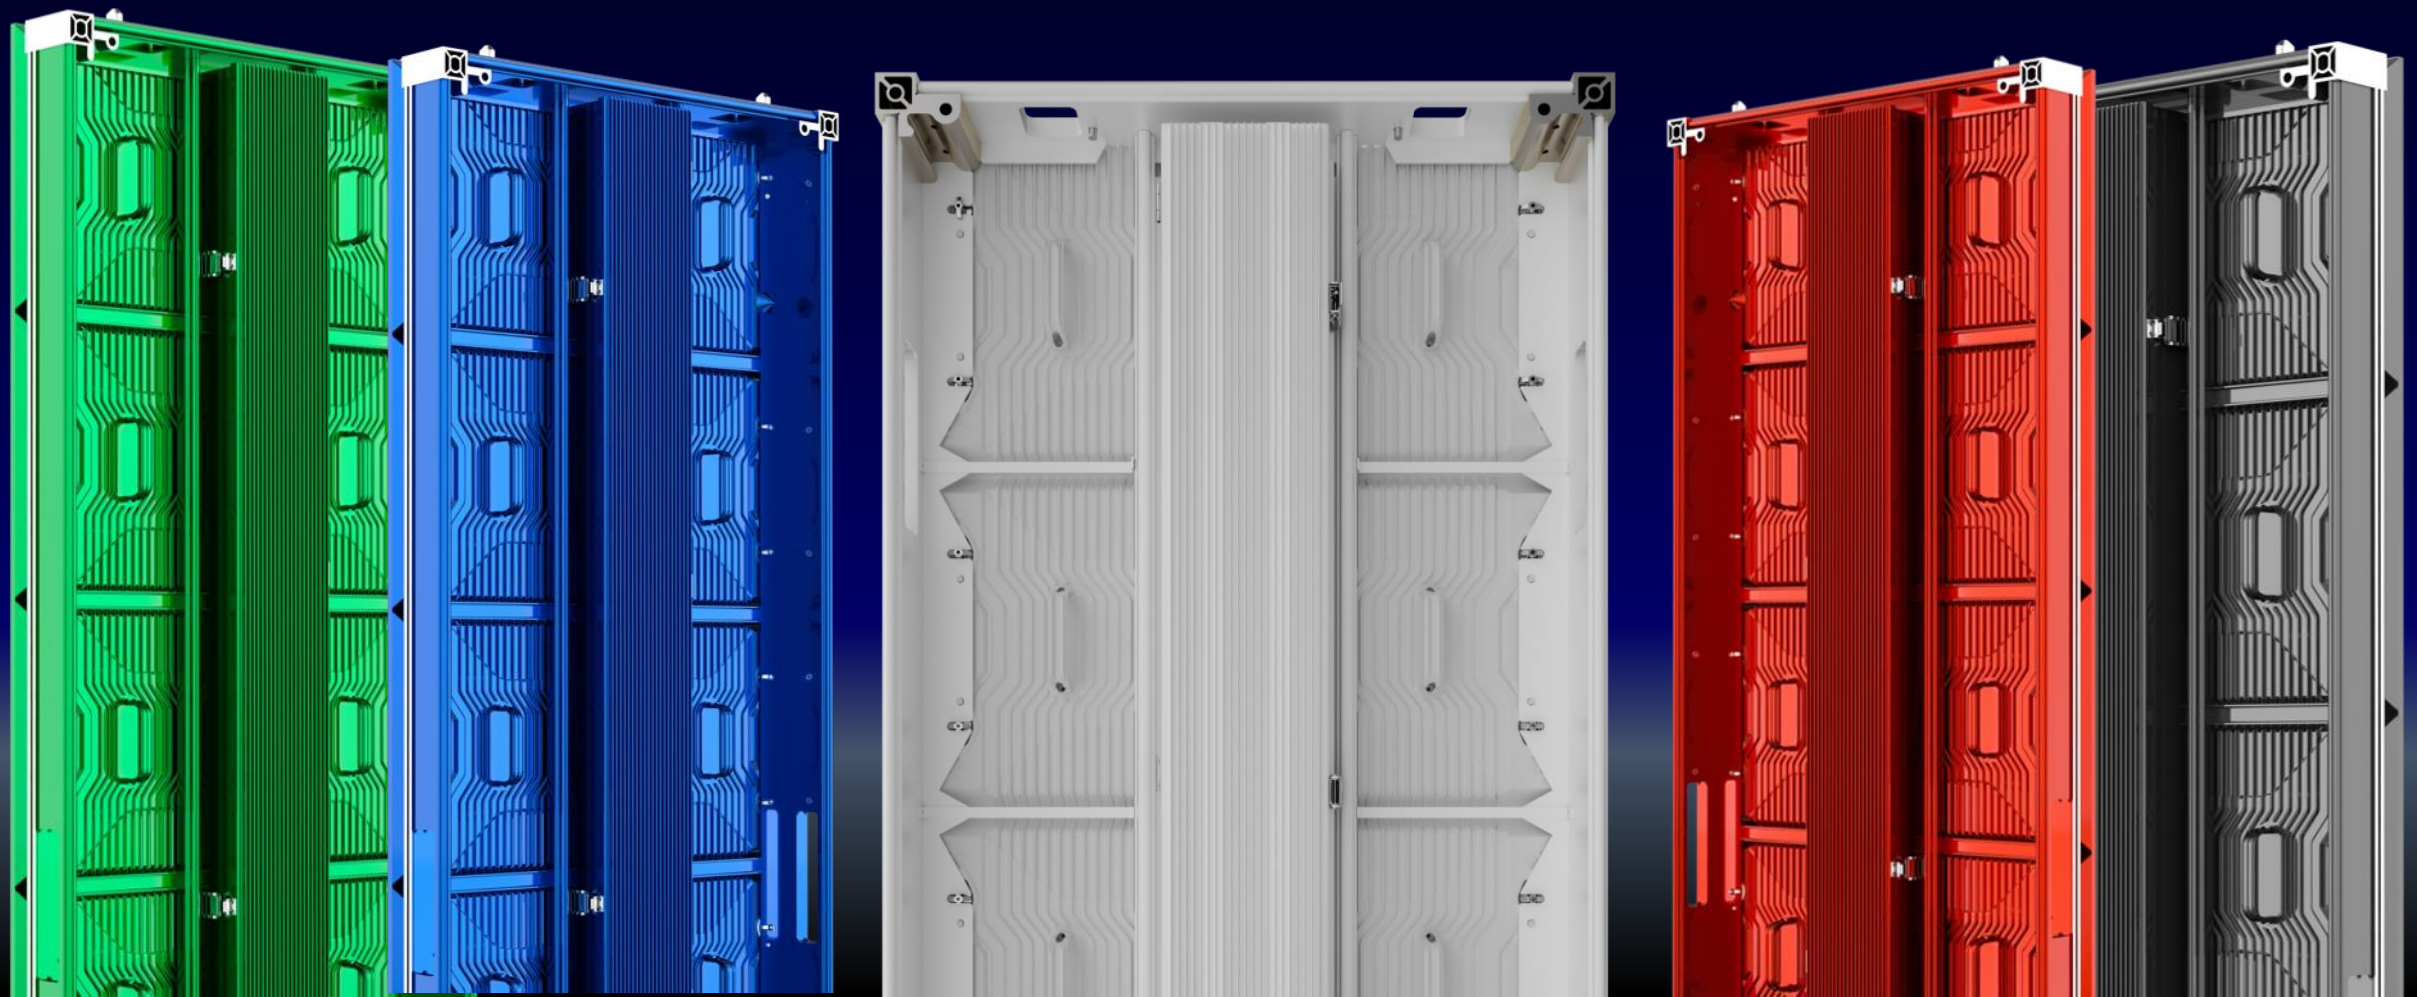

Easy way to maintain the product

Support full front and rear installation and maintenance, improve product efficiency

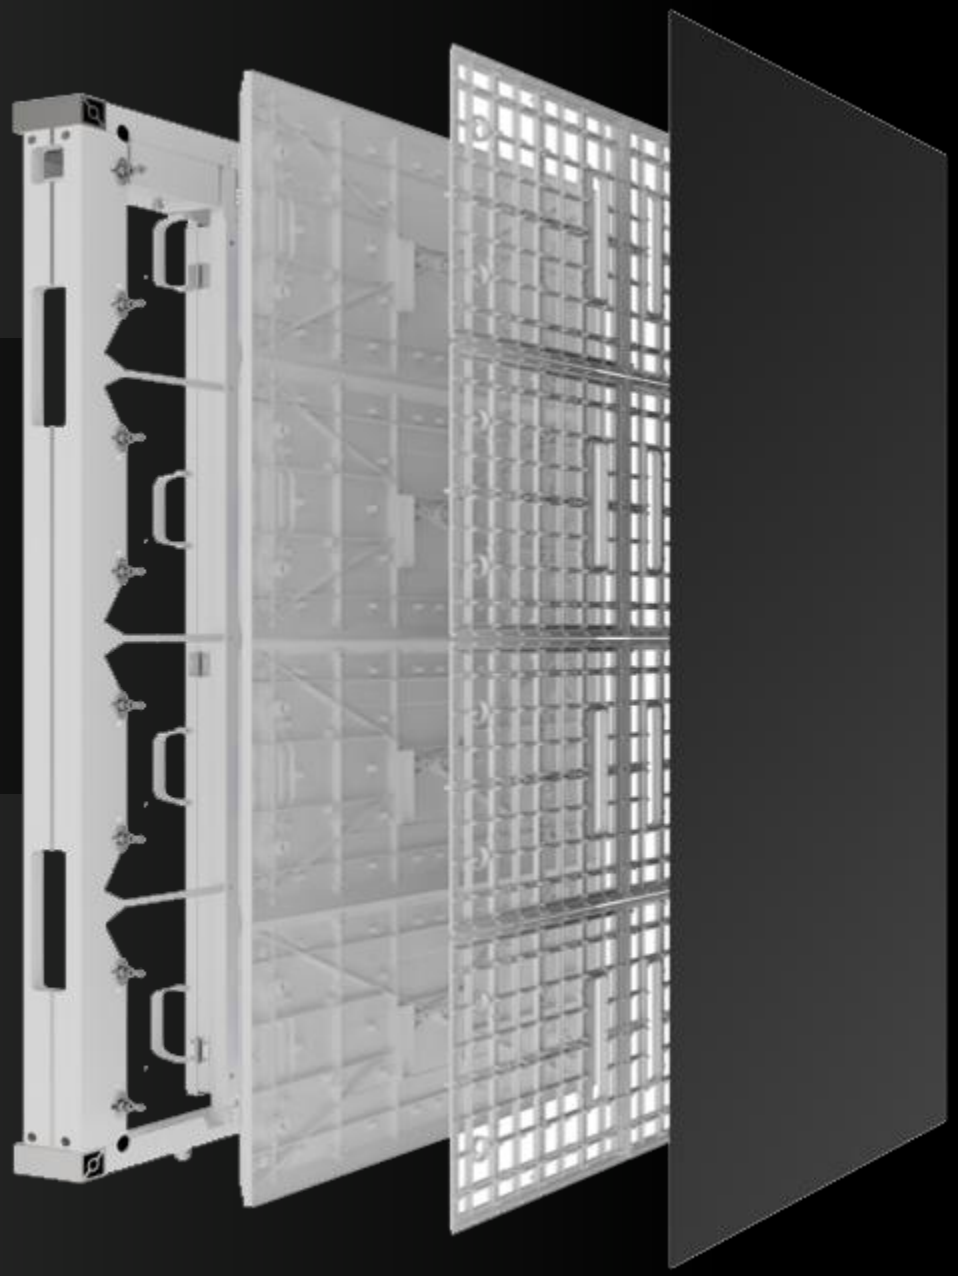

Create more possibilities

Multiple size combinations for more assembly possibilities

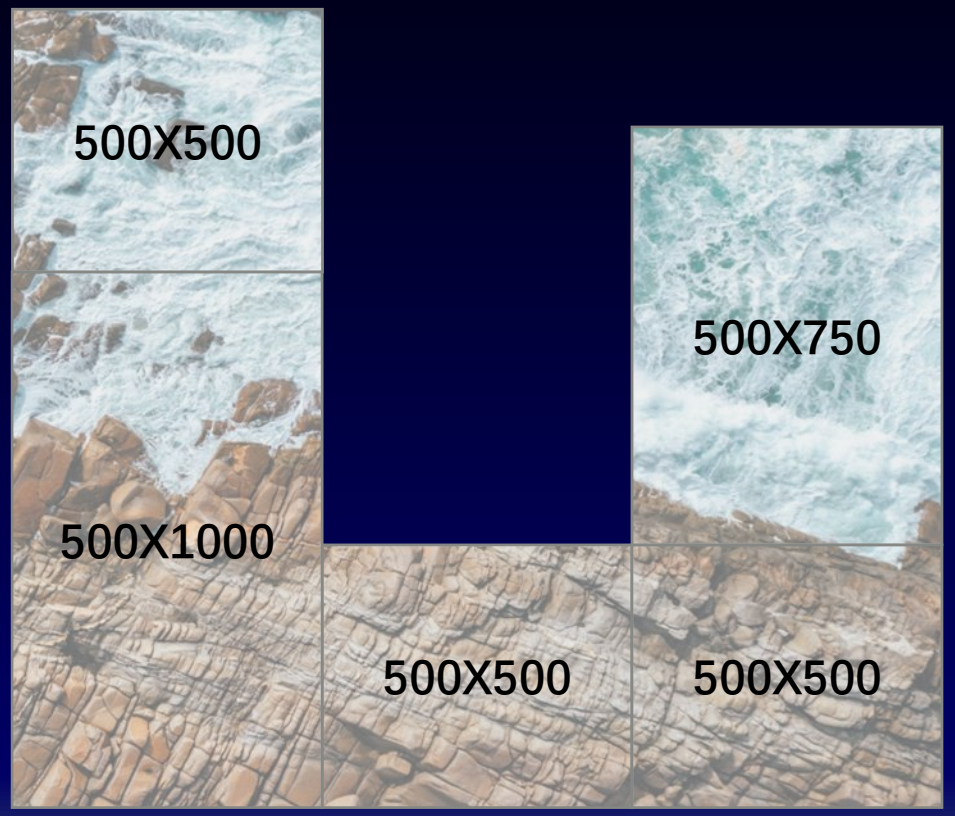

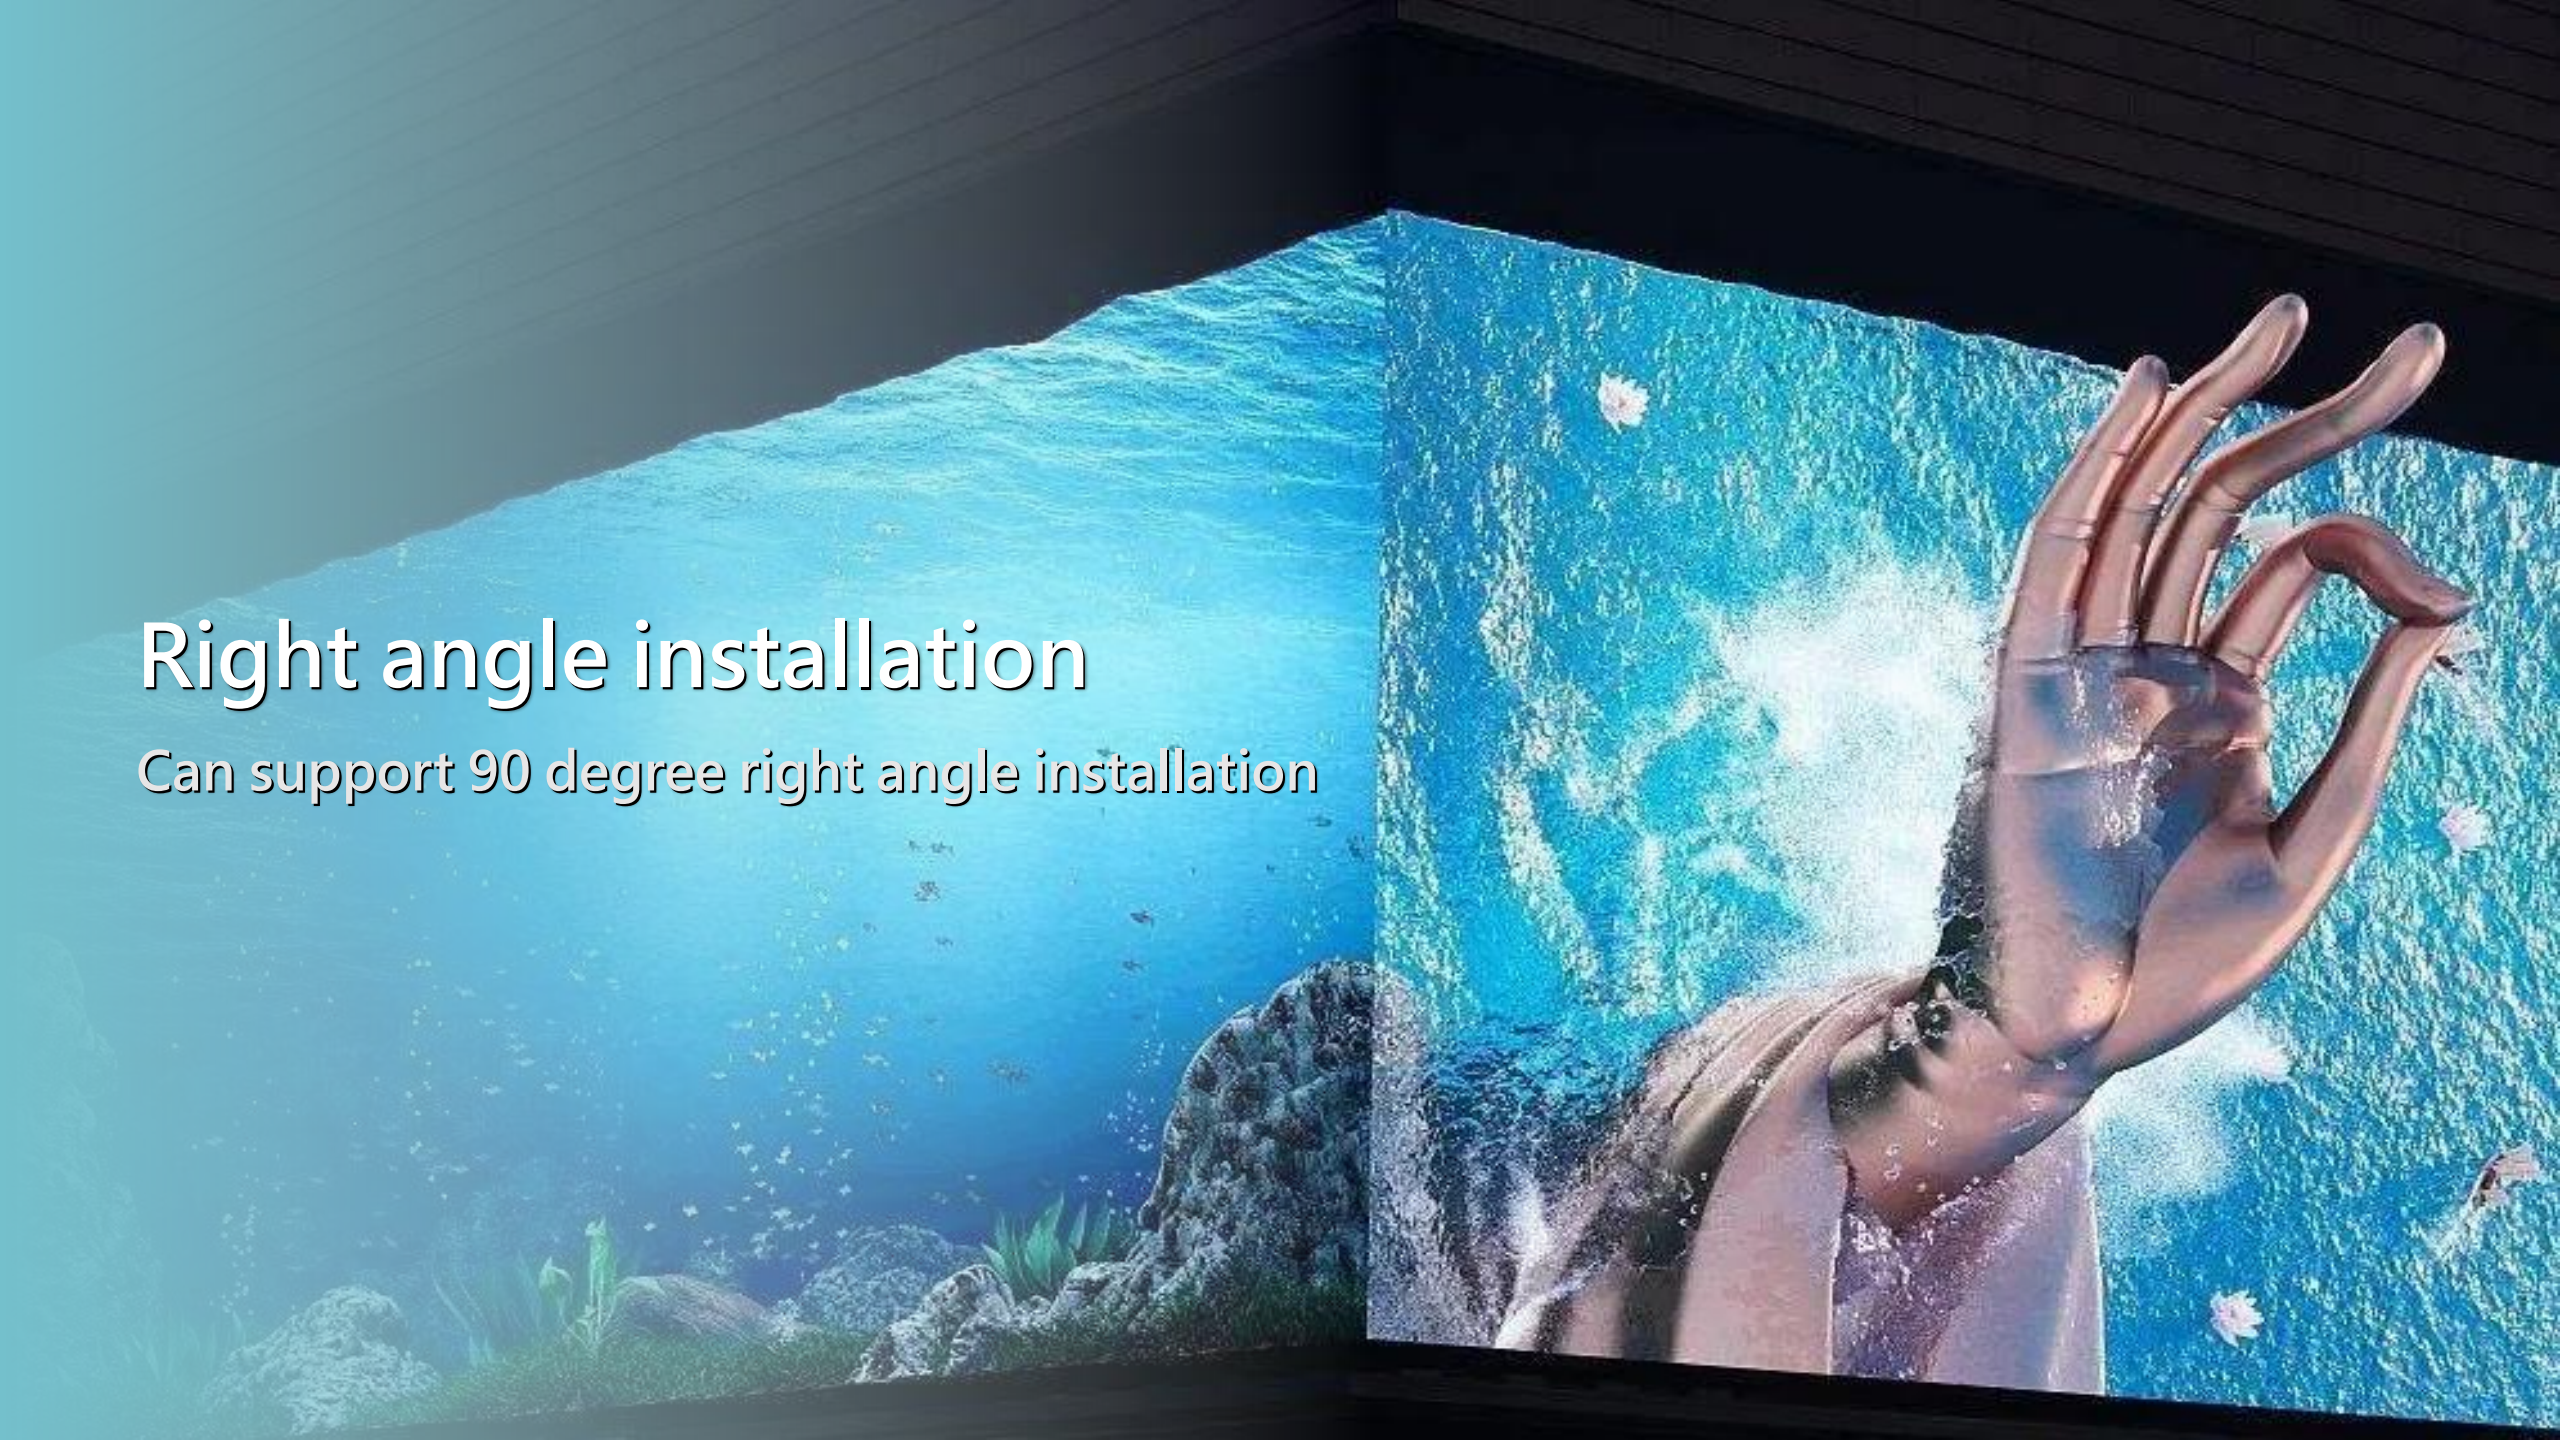

Right angle installation

Can support 90 degree right angle installation

Consolidation

Support outdoor wall mounting, naked installation

Hoisting

Support multi-cabinet lifting

Product model	T390B-500	T390B-750	T390B-1000	T480B-500	T480B-750	T480B-1000
Pixel Pitch (mm)	3.9	3.9	3.9	4.8	4.8	4.8
Pixel Density (dots/㎡)	65,536			43,264		
Size (mm)	500*500	500*750	500*1,000	500*500	500*750	500*1,000
Material	Aluminum profiles					
Weight (Kg)	9.6	12.5	16.6	9.6	12.5	16.6
Grey (Bit)	14					
Refresh Rate (Hz)	3,840					
Brightness (nits)	5,000					
AC Input Voltage	AC200~240V±10%(50hz/60Hz)					
Max Power (W/㎡)	280	420	560	280	420	560
Avg Power (W/㎡)	100	150	200	100	150	200
Protection (Front/Back)	IP65					
Installation	Pre-installation，Post-installation					
Maintenance	Pre-maintenance，Post-maintenance					

As the product will continue to be upgraded, the final interpretation of the above parameters belongs to NOVA

NOVA media

數位看板應用整合服務商

OLED LED LCD KIOSK VIDEO WALL

專案設計部

105台北市松山區南京東路四段1號7樓　7F.,No.1 Sec4, Nanjing E. Rd., Songshan District Taipei, Taiwan(R.O.C)
TEL 02-2718-2099　FAX 02-25471909

www.novads.com.tw